

Matta 5

Ø 45 mm



Main characteristics

- 230 V AC - 50 Hz
- Mechanical limit switch
- Optional outdoor receiver
- Compact motor



Shutters



Blinds



Wired



5-year warranty



Short

Specific features

Can be used on a 50 mm round or octagonal tube.

Particularly suitable for application on small blinds or shutters.

Manual mechanical limit switch with screw-based progressive adjustment.

Double spacing to enable fixing using a wide range of supports.

Holes on the head at 29 mm and 46 mm.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



RECEIVERS

Outdoor receivers.



WEATHER

Sensors and weather stations.



PUSHBUTTON PANELS

Buttons and switches.



Matta 5

Ø 45 mm



KDEP#TENPEA4S113

Dimensions (mm)

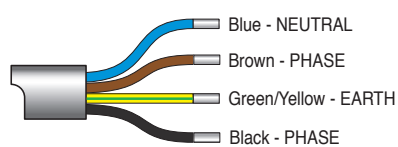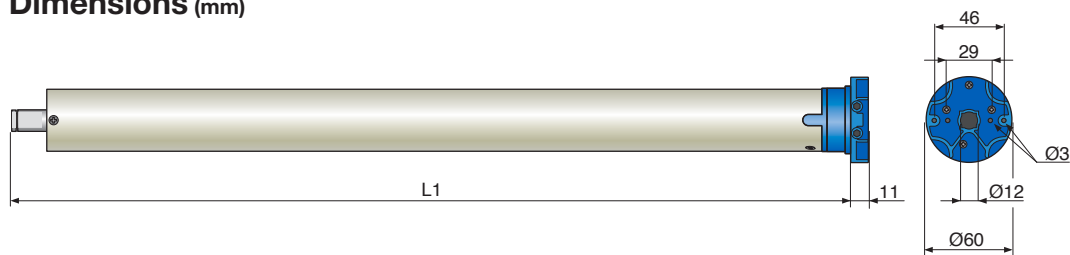

Matta 5

CODE 001Y5010A151MA 001Y5020A151MA

Technical information

Torque (Nm)	10	20
Speed (RPM)	15	15
Hoisted weight (kg)*	18	36
Limit switch turns (turns)	16	16
Duration of operation (min)	4	4
Power draw (A)	0.49	0.64
Power (W)	112	145
Protection rating (IP)	44	44
L1 length (mm)	340	355
Weight (kg)	1.4	1.55
Package dimensions (mm)	518x80x80	518x80x80
Weight of packaged motor (kg)	1.65	1.9
Cable length (m)	2.5	2.5
Cable cross-section (mm) ²	4G 0.75	4G 0.75

* Load calculated for 50 mm roller.

Dedicated support for the Matta 5 tubular motor.



PRODUCTS
CE

www.came.com