

# Mondrian M9

Ø 92 mm



## Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Built-in emergency operation



Shutters



Awnings



Emergency  
operation



Cable-  
based

## Specific features

Can be used on a 102 mm round tube.

Manual mechanical limit-switch with screw-based progressive adjustment.

Also works on shutters and garage doors.

Manually activated with emergency wand.

Reduction ratio: 1:320 motor 300 Nm.

Reduction ratio: 1:250 motor 230 Nm.

Connection cable included: 2.5 m.

Emergency operation already included in the packaging.

## Control accessories



### COMMAND ACCESSORIES

Buttons and switches.



# Mondrian M9

Ø 92 mm



KDEP#TEN2PRA4S112

## Dimensions (mm)

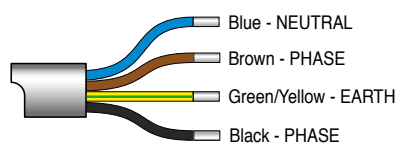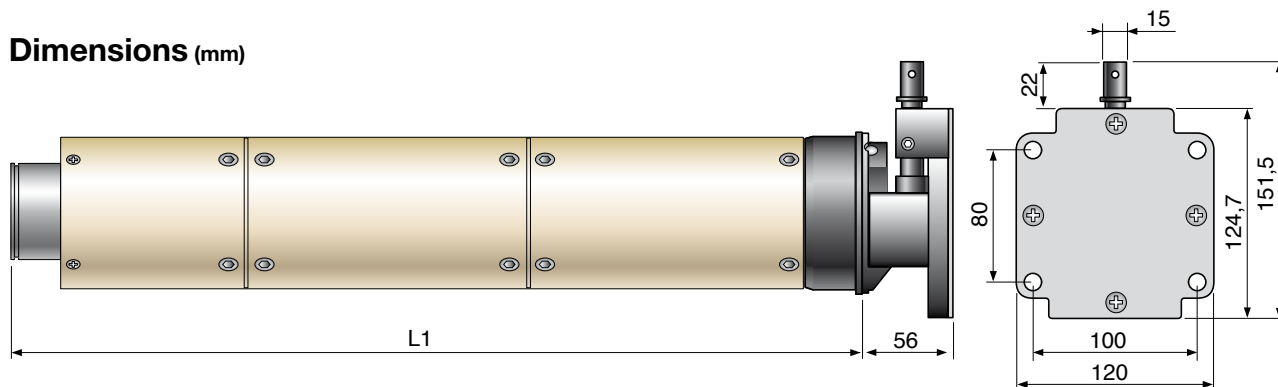

## Mondrian M9

CODE

001Y9230A121MOM 001Y9300A091MOM

## Technical information

Torque (Nm)	230	300
Rpm speed (turns/min)	12	9
Hoisted weight (Kg)*	290	370
Limit-switch turns (turns)	22	22
Duration of operation (min)	4	4
Power draw (A)	2.75	2.96
Power (W)	602	661
Protection rating (IP)	44	44
Length (mm) = L1	534	554
Weight (Kg)	13.26	14.26
Package dimensions (mm)	650x165x235	650x165x235
Weight of packaged motor (kg)	13.96	14.98
Cable length (m)	2.5	2.5
Cable section (mm) <sup>2</sup>	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

\* Calculated load per 102 mm roller.

PRODUCTS  
**CE**

[www.came.com](http://www.came.com)