

Mondrian R6

Ø 55 mm



Main characteristics

- 230 V AC - 50 Hz
- Mechanical limit switch
- Built-in 433.92 MHz radio receiver



Shutters



Awnings



Radio-based

Specific features

Can be used on a 70 mm round or octagonal tube.

Manual mechanical limit switch with screw-based progressive adjustment.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



WEATHER

Sensors and weather stations.



BACK KLT

Awning protection, radio device.



Mondrian R6

Ø 55 mm



KDEP#TEN20A4S12Z

Dimensions (mm)

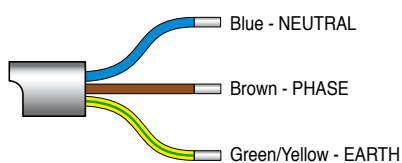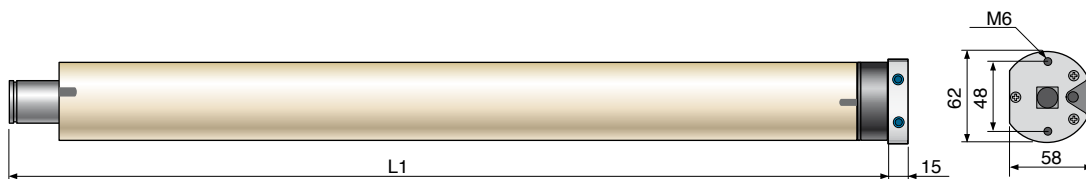

Mondrian R6

CODE 001Y6080A121MOR 001Y6100A101MOR 001Y6120A081MOR

Technical information

Torque (Nm)	80	100	120
Speed RPM (turns/min)	12	10	8
Hoisted weight (kg)*	114	143	171
Limit switch turns (turns)	23	23	23
Duration of operation (min)	4	4	4
Power draw (A)	1.65	1.68	1.68
Power (W)	385	393	393
Protection rating (IP)	44	44	44
Length (mm) = L1	710	710	730
Weight (kg)	4.80	4.85	5.10
Package dimensions (mm)	860x120x120	860x120x120	860x120x120
Weight of packaged motor (kg)	5.2	5.2	5.3
Cable length (m)	2.5	2.5	2.5
Cable cross-section (mm) ²	3G 0.75	3G 0.75	3G 0.75

* Load calculated for 70 mm roller.

PRODUCTS



www.came.com