

Mondrian 6

Ø 55 mm



Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Optional outdoor receiver



Shutters



Awnings



Cable-based



5 Year Warranty

Specific features

Can be used on a 70 mm round or octagonal tube.

Manual mechanical limit-switch with screw-based progressive adjustment.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS AND TIMERS

up to 15 channels.



RECEIVERS

Outdoor receivers.



COMMAND ACCESSORIES

Buttons and switches.



Mondrian 6

Ø 55 mm



KDEP#TEN20A4S112

Dimensions (mm)

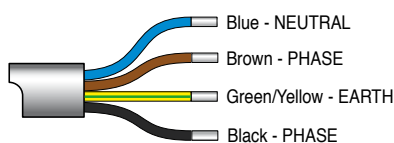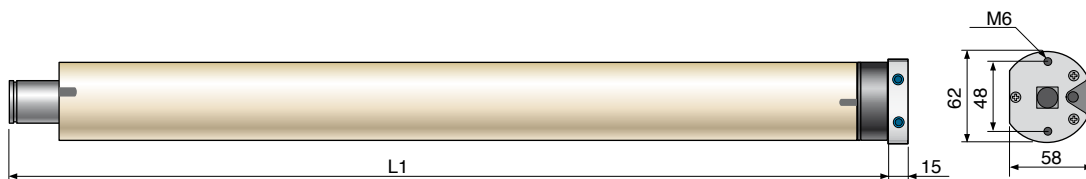

Mondrian 6

CODE 001Y6080A121MO 001Y6100A101MO 001Y6120A081MO

Technical information

Torque (Nm)	80	100	120
Rpm speed (turns/min)	12	10	8
Hoisted weight (Kg)*	114	143	171
Limit-switch turns (turns)	23	23	23
Duration of operation (min)	4	4	4
Power draw (A)	1.71	1.68	1.64
Power (W)	396	385	375
Protection rating (IP)	44	44	44
Length (mm) = L1	570	570	590
Weight (Kg)	4.8	4.8	5.25
Package dimensions (mm)	650x120x120	650x120x120	700x120x120
Weight of packaged motor (kg)	5.2	5.2	5.65
Cable length (m)	2.5	2.5	2.5
Cable section (mm) ²	4G 0.75	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

* Calculated load per 70 mm roller.

PRODUCTS



www.came.com