

Ensor 5

Ø 45 mm



Main characteristics

- 230 V AC - 50 Hz
- Wired electronic limit switch



Shutters



Awnings



Blinds



Cable-based

Specific features

Can be used on 50 mm octagonal or ogive tube.

Universal head for applying any type of anchoring plate.

Inversion of the direction of operation in both directions if an obstacle is detected.

Connection cable included: 2.5 m.

Control accessories



**PUSH
BUTTON PANELS**
Buttons and switches.



001YE0124
Special accessory
for programming and
power supply.



Ensor 5

Ø 45 mm



KDEP#TENPHAS113

Dimensions (mm)

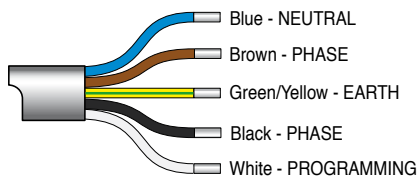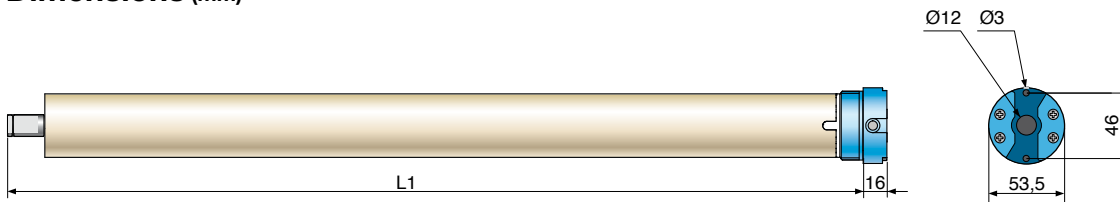

Ensor 5

CODE 001Y5010A151EN 001Y5020A151EN 001Y5030A151EN 001Y5040A121EN

Technical information

Torque (Nm)	10	20	30	40
Speed RPM (turns/min)	15	15	15	12
Hoisted weight (kg)*	18	36	55	74
Limit switch turns (turns)	-	-	-	-
Duration of operation (min)	4	4	4	4
Power draw (A)	0.48	0.69	0.87	0.99
Power (W)	113	161	200	228
Protection rating (IP)	44	44	44	44
Tube length (mm) = L1	604	604	654	654
Weight (kg)	2.21	2.29	2.6	2.7
Package dimensions (mm)	660x80x80	660x80x80	710x80x80	710x80x80
Weight of packaged motor (kg)	2.47	2.64	3.0	3.1
Cable length (m)	2.5	2.5	2.5	2.5
Cable cross-section (mm) ²	5G 0.75	5G 0.75	5G 0.75	5G 0.75

* Load calculated for 50 mm roller.

PRODUCTS



www.came.com