

Mondrian M5

Ø 45 mm



Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Built-in emergency operation



Shutters



Awnings



Emergency
operation



Cable-
based

Specific features

Can be used on a 50 mm round or octagonal tube.

Manual mechanical limit-switch with screw-based progressive adjustment.

Manually activated with emergency wand.

Reduction ratio: 1:24.

Connection cable included: 2.5 m.

Control accessories



WEATHER UNIT

Wind sensor.



COMMAND ACCESSORIES

Buttons and switches.



EMERGENCY OPERATIONS

Wands, joints
and eyelets.



Mondrian M5

Ø 45 mm



KDEP#TEN2PA4S112

Dimensions (mm)

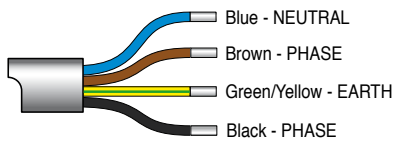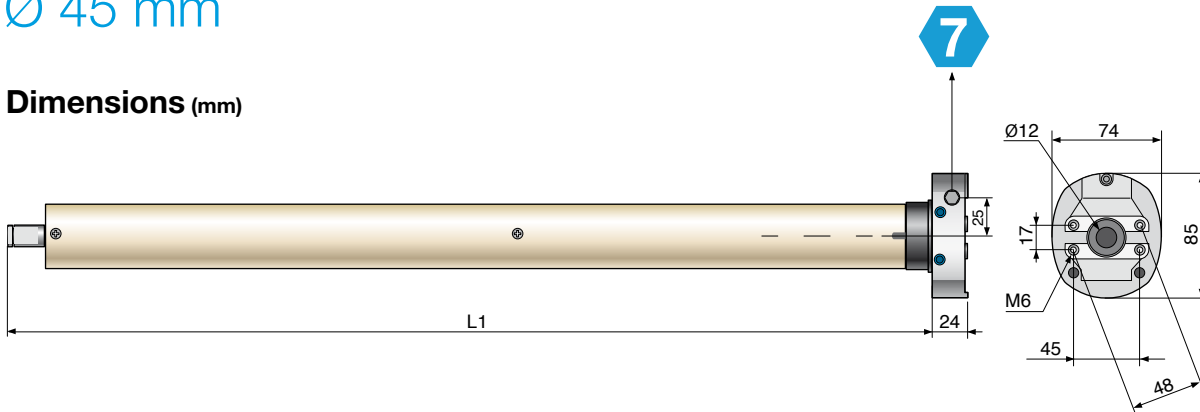

Mondrian M5

CODE 001Y5020A151MOM 001Y5030A151MOM 001Y5040A151MOM 001Y5050A121MOM

Technical information

	20	30	40	50
Torque (Nm)	20	30	40	50
Rpm speed (turns/min)	15	15	15	12
Hoisted weight (Kg)*	36	55	74	92
Limit-switch turns (turns)	23	23	23	23
Duration of operation (min)	4	4	4	4
Power draw (A)	0.64	0.83	0.86	0.89
Power (W)	145	191	198	205
Protection rating (IP)	44	44	44	44
Length (mm) = L1	526	586	586	586
Weight (Kg)	2.4	2.85	3.16	3.32
Package dimensions (mm)	650x120x120	650x120x120	650x120x120	650x120x120
Weight of packaged motor (kg)	2.8	3.2	3.46	3.62
Cable length (m)	2.5	2.5	2.5	2.5
Cable section (mm) ²	4G 0.75	4G 0.75	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

* Calculated load per 50 mm roller.

PRODUCTS



www.came.com