

Klimt 4

Ø 35 mm



Main characteristics

- 230 V AC - 50 Hz
- Electronic limit switch
- Built-in 433.92 MHz radio receiver



Shutters



Blinds



Radio-based

Specific features

Can be used on a 40 mm round or octagonal tube.

Ideal for blinds and sun protection screens.

Universal head for applying any type of anchoring plate.

Adjustment of the middle endpoint (partial opening) possible.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



WEATHER

Sensors and weather stations.


Klimt 4

Ø 35 mm



KDEP#TENPFA4S113

Dimensions (mm)

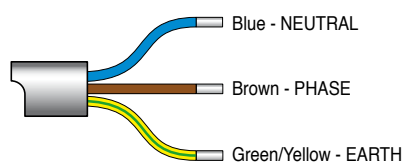

Klimt 4

CODE

001Y4006A281KL

001Y4010A171KL

Technical information

Torque (Nm)	6	10
Speed RPM (turns/min)	28	17
Hoisted weight (kg)*	17	28
Limit switch turns (turns)	30	30
Duration of operation (min)	4	4
Power draw (A)	0.53	0.53
Power (W)	121	121
Protection rating (IP)	44	44
Length (mm) = L1	594	594
Weight (kg)	1.46	1.58
Package dimensions (mm)	660x80x80	660x80x80
Weight of packaged motor (kg)	1.7	1.8
Cable length (m)	2.5	2.5
Cable cross-section (mm) ²	3G 0.75	3G 0.75

* Load calculated for 40 mm roller.

PRODUCTS



www.came.com