

# Ensor 4

Ø 35 mm



## Main characteristics

- 230 V AC - 50 Hz
- Wired electronic limit switch



Shutters



Blinds



Wired

## Specific features

Can be used on 40 mm octagonal or ogive tube.

Ideal for blinds.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

## Control accessories



### PUSH BUTTON PANELS

Buttons and switches.



### 001YE0124

Special accessory for programming and power supply.



# Ensor 4

Ø 35 mm



KDEP#TENPGA4S113

## Dimensions (mm)

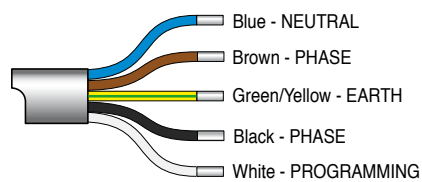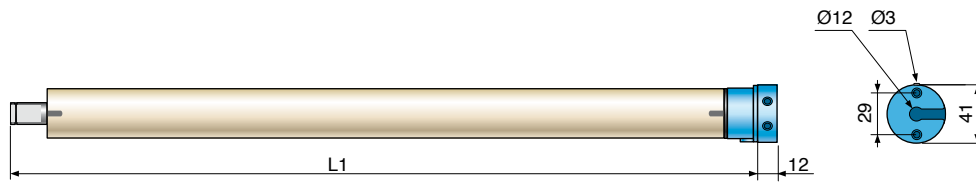

## Ensor 4

CODE 001Y4006A281EN 001Y4010A171EN

## Technical information

Torque (Nm)	6	10
Speed RPM (turns/min)	28	17
Hoisted weight (kg)*	17	28
Limit switch turns (turns)	30	30
Duration of operation (min)	4	4
Power draw (A)	0.53	0.53
Power (W)	121	121
Protection rating (IP)	44	44
Tube length (mm) = L1	604	604
Weight (kg)	1.46	1.58
Package dimensions (mm)	660x80x80	660x80x80
Weight of packaged motor (kg)	1.7	1.8
Cable length (m)	2.5	2.5
Cable cross-section (mm) <sup>2</sup>	5G 0.75	5G 0.75

\* Load calculated for 40 mm roller.



www.came.com