

# Mondrian 4

Ø 35 mm



## Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Optional outdoor receiver



Shutters



Blinds



Cable-based



5 Year Warranty

## Specific features

Can be used on a 40 mm round or octagonal tube.

Manual mechanical limit switch-with screw-based progressive adjustment.

Ideal for small awning boxes.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

## Control accessories



### TRANSMITTERS AND TIMERS

up to 15 channels.



### RECEIVERS

Outdoor receivers.



### COMMAND ACCESSORIES

Buttons and switches.



# Mondrian 4

Ø 35 mm



KDEP#TEN2/LA4S112

## Dimensions (mm)

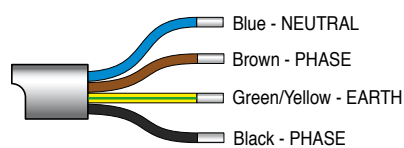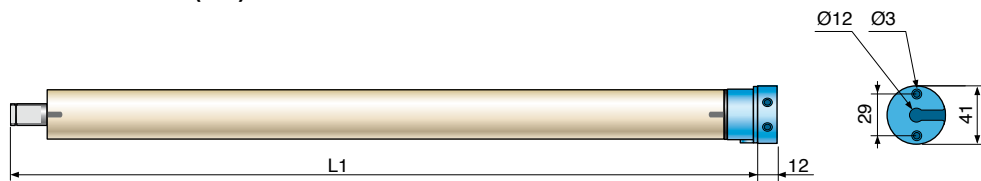

## Mondrian 4

CODE

001Y4006A281MO

001Y4010A171MO

## Technical information

Torque (Nm)	6	10
Rpm speed (turns/min)	28	17
Hoisted weight (Kg)*	17	28
Limit-switch turns (turns)	30	30
Duration of operation (min)	4	4
Power draw (A)	0.53	0.53
Power (W)	121	121
Protection rating (IP)	44	44
Length (mm) = L1	432	432
Weight (Kg)	1.46	1.58
Package dimensions (mm)	540x70x70	540x70x70
Weight of packaged motor (kg)	1.7	1.8
Cable length (m)	2.5	2.5
Cable section (mm) <sup>2</sup>	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

\* Calculated load for 40 mm roller.

PRODUCTS



www.came.com